



TECHNICAL DATA SHEET




PRODUCT INFORMATION

DuPont™ Tyvek® 400 Coverall. Comfort Fit Design. Stormflap. Respirator Fit Hood. Elastic Wrists and Ankles. Elastic Waist. Serged Seams. White.

ATTRIBUTES

Full Part Number	TY127SWHxx0025yy (xx=size;yy=option code)
Fabric/Materials	Tyvek® 400
Design	Coverall w/ Resp. Fit Hood, Elastic Wrists and Ankles
Seam	Serged
Color	White
Quantity/Box	25 per case
Sizes	MD, LG, XL, 2X, 3X, 4X, 5X, 6X, 7X
Option Codes	VP,00,NF

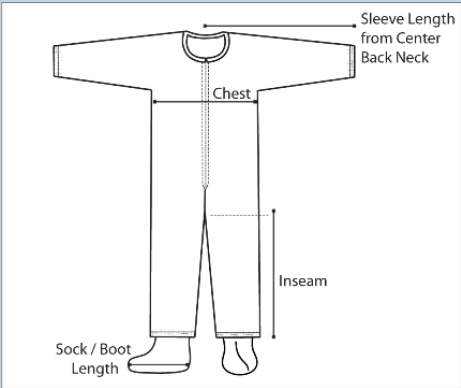

SIZE TABLE

SIZE	SLEEVE LENGTH	CHEST WIDTH	INSEAM	FITS CHEST	FITS HEIGHT
LG	35	26 1/2	29	39 3/4 - 43 1/4	5'5" - 5'9"
XL	36 1/2	28	29 1/2	42 3/4 - 46 1/4	5'8" - 6'2"
2X	38	29 1/4	30 1/2	45 1/4 - 48 3/4	6'0" - 6'4"
3X	38	31 1/4	31 1/2	49 1/4 - 52 3/4	6'2" - 6'4"
4X	38 1/2	33	32 1/2	52 3/4 - 56 1/4	6'4" - 6'7"
5X	39 1/2	34 1/2	33 1/2	55 3/4 - 59 1/4	6'7" - 6'10"
6X	41	36 1/4	34 1/2	59 1/4 - 62 3/4	6'9" - 7'1"
7X	42	37 1/2	35 1/2	61 3/4 - 65 1/4	7'0" - 7'4"

PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	TYPICAL RESULT
Thickness	ASTM D1777	5.9 mils
Basis Weight	ASTM D3776	1.2 oz/yd ₂
Burst Strength - Mullen	ASTM D774	50 psi
Seam Strength	ASTM D1683	> 19 lb _f
Breaking Strength - Grab (MD)	ASTM D5034	18 lb _f /in
Breaking Strength - Grab (CD)	ASTM D5034	22 lb _f /in
Hydrostatic Head	AATCC 127	45 inches H ₂ O
Surface Resistivity (25°C / 55% RH)	ASTM D257	< 6.3 x 10 ⁹ ohms /square
Wearing Apparel Flammability	16 CFR 1610 	Class 1

DuPont™ SafeSPEC™ - We're here to help

Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical, controlled environment, thermal and mechanical hazards.

safespec.dupont.com



DuPont Personal Protection
safespec.dupont.com
dpp.dupont.com

 DuPont Personal Protection

 @DuPontPPE

Connect with us  

CREATED ON: OCTOBER 11, 2021

© 2021 DuPont. All rights reserved. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.